

# User Manual

# Presenter



**2020**

## Contents

1. Device Requirements .....	3
1.1 Receiver.....	3
1.2 Sender .....	3
2. Product Appearance.....	3
3. Pairing .....	4
2.1 Indicator Status in Pairing.....	4
2.2 Pair with Android Receiver .....	4
2.3 Pair with Windows Receiver.....	6
4. Share Screen.....	8
3.1 Indicator Status in Sharing .....	8
3.2 Start/Stop Sharing.....	8
3.3 Extend Screen.....	8

## 1. Device Requirements

### 1.1 Receiver

- 1) ESharePro app is installed and activated.
- 2) Network: 5G Wi-Fi hotspot or LAN or WLAN.

### 1.2 Sender

- 1) Windows PC: Win 7 / Win 8 / Win 10
- 2) MacBook: macOS 9.0 or later
- 3) Chrome Book
- 4) Linux
- 5) Other devices with HDMI output available

## 2. Product Appearance



Picture 1 HDMI Screen Sharing Button Appearance

### 3. Pairing


#### 2.1 Indicator Status in Pairing

- 1) **Blinking in blue:** HDMI Screen Sharing Button (hereinafter referred to as the “Button”) is starting up or pairing.
- 2) **Continuously on and in blue:** The Button is paired successfully.
- 3) **Blinking in red:** The Button fails to pair with the receiver.

#### 2.2 Pair with Android Receiver

##### 2.2.1 Auto Pair


- 1) Prerequisite: 5G Wi-Fi hotspot is enabled on the Android receiver.
- 2) Steps: plug the Button into the USB port of Android receiver, and the Button will pair with the receiver automatically. Please don't unplug the Button while pairing, as shown in Picture 2:

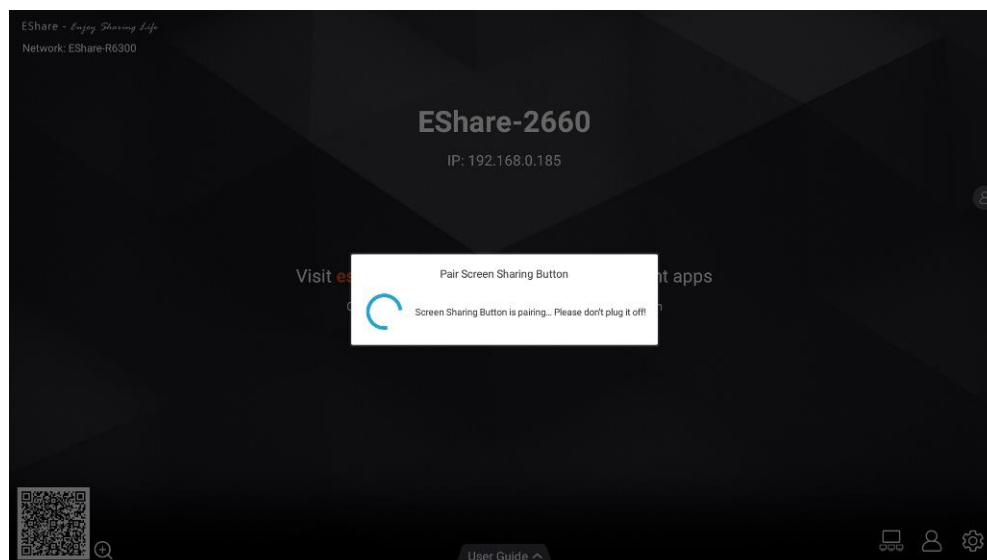

Picture 2 Auto Pair with Android Receiver

3) It shows the Button is paired if the message “Saved!” pops up, as shown in

Picture 3:

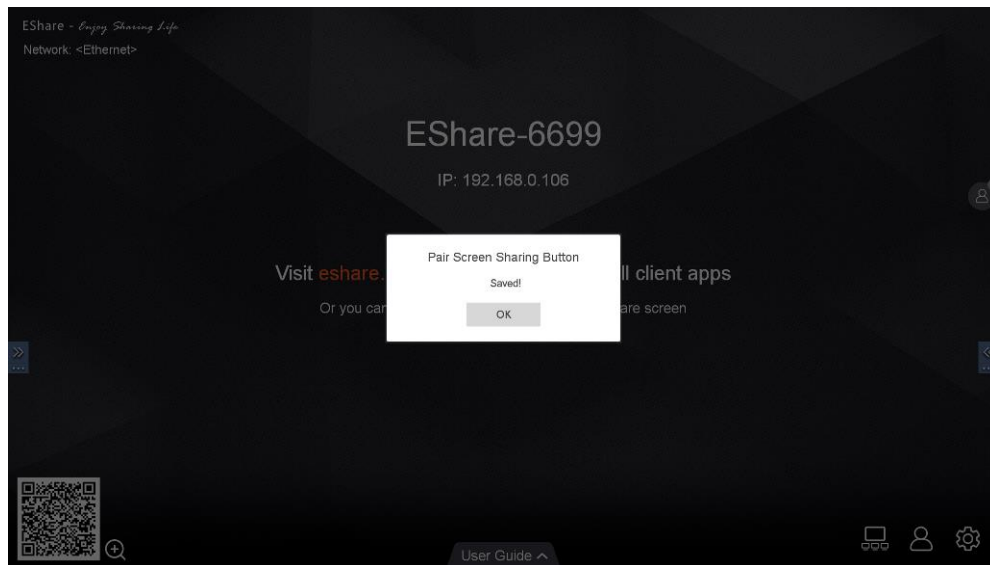

Picture 3 Paired with Android Receiver


### 2.2.2 Pair Manually

1) Prerequisite: LAN or WLAN is available for Android receiver.

2) Steps:


Step 1: plug the Button into the USB port of Android receiver, and enter the Wi-Fi SSID and password associated with the receiver in the pairing dialog, as shown in

Picture 4:

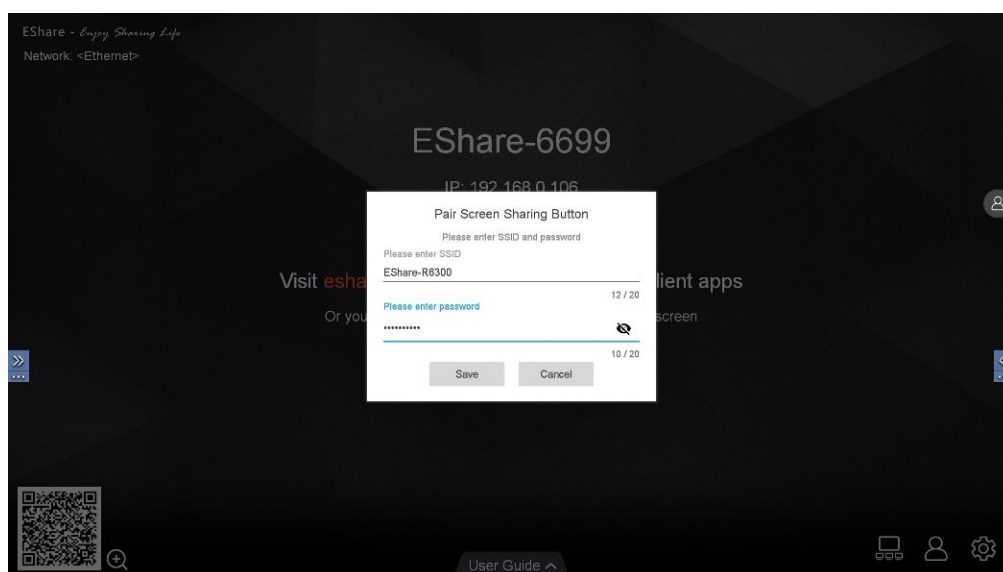

Picture 4 Manually Pair with Android Receiver

Step 2: Check if the network information is entered correctly, and then tap the “Save” button. It shows the Button is paired if the message “Saved!” pops up, as shown in Picture 5:

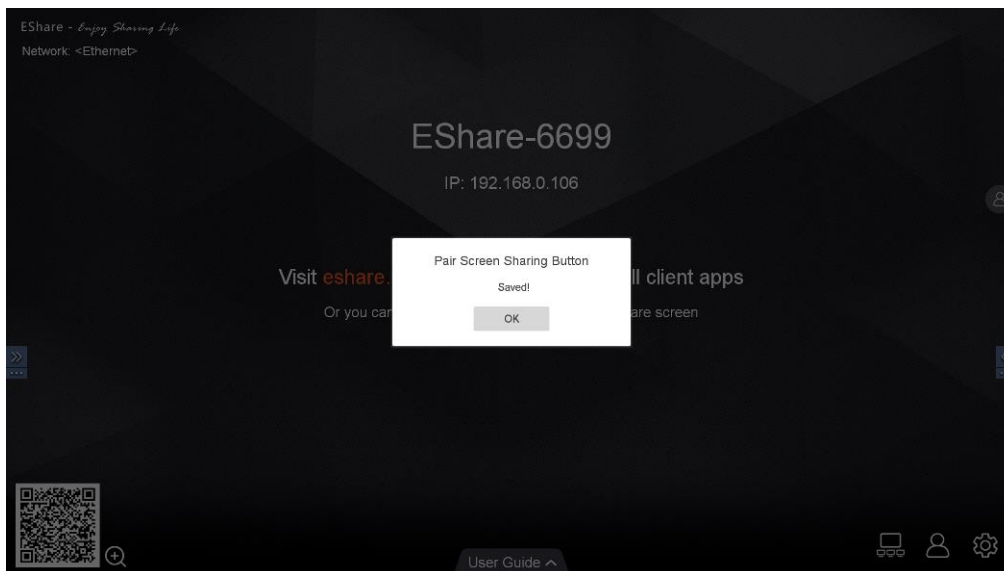


Picture 5 Paired with Android Receiver

### 2.3 Pair with Windows Receiver


- 1) Prerequisite: 5G Wi-Fi hotspot is enabled, or LAN/WLAN is available for Windows receiver.
- 2) Steps:

Step 1: plug the Button into the USB port of Windows receiver, and the pairing dialog will pop up automatically, as shown in Picture 6:

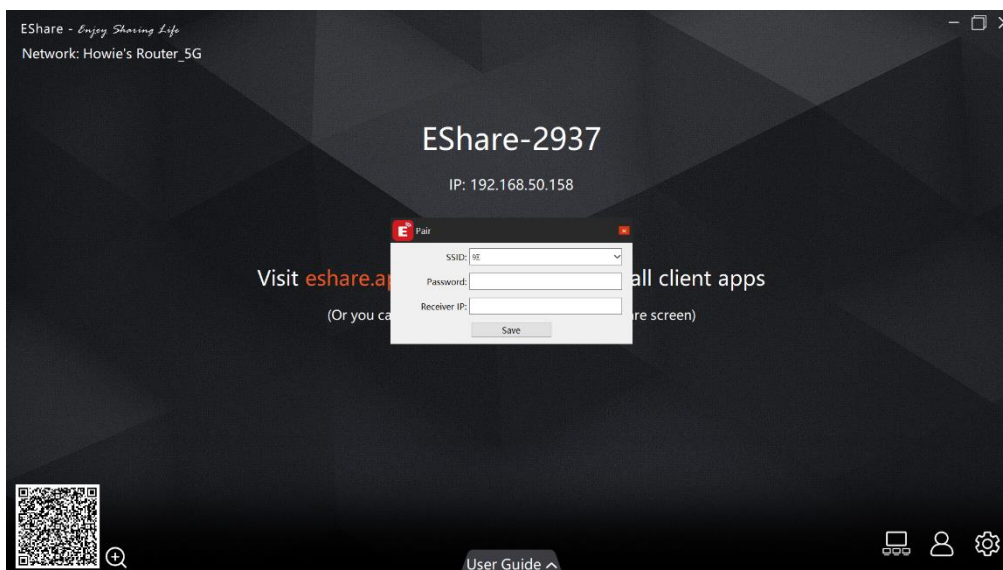


Picture 6 Manually Pair with Windows Receiver

Step 2: Select the SSID in the drop-down list of “Network”, or you can also enter the SSID, as shown in Picture 7:

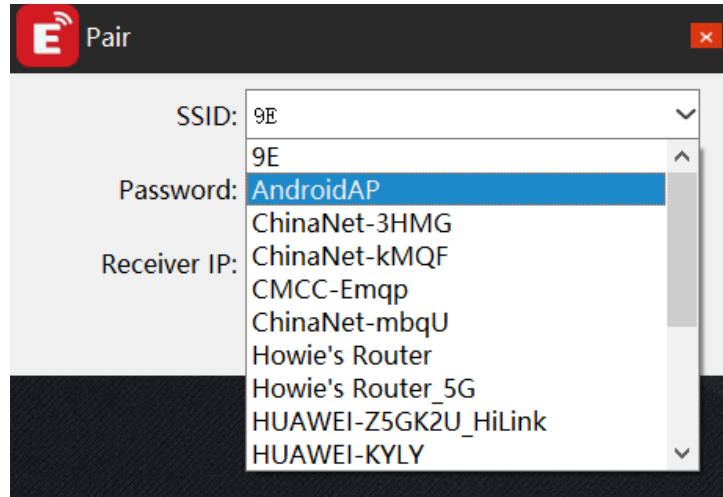


Picture 7 Select SSID for Pairing

Step 3: Enter the password and the IP address of the windows receiver (shown on the Eshare Server screen) and tap the “Save” button. It shows the Button is paired if the message “Saved!” pops up, as shown in Picture 8 and Picture 9:

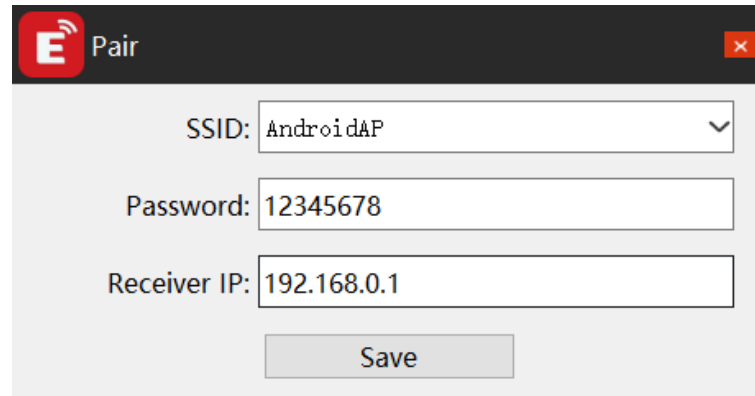

Picture 8 Manually Pair with Windows Receiver

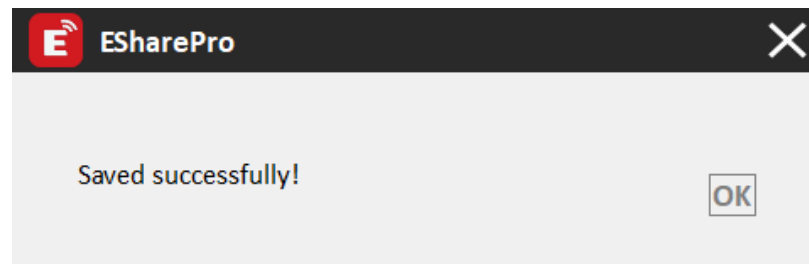

Picture 9 Paired with Windows Receiver

**Note:** The automatic pairing is unavailable on Windows receiver.

## 4. Share Screen

### 4.1 Indicator Status in Sharing

- 1) **Blinking in blue:** The Button is connecting.
- 2) **Continuously on and in blue:** The Button is connected.
- 3) **Blinking in red:** The Button fails to connect with the receiver.

Plug both USB and HDMI cables of the Button into the sender, and the Button indicator will blink in blue.

It shows that the Button is connected with the receiver and ready for screen sharing if the indicator turns blue and continuously on.

### 4.2 Start/Stop Sharing

Plug the paired Button into the sender and wait until the indicator turns blue and is continuously on. Tap the button to start screen sharing, tap again to stop sharing.

### 4.3 Extend Screen

You can also set the display mode as extend display in the display settings of the OS on the sender.



## 5. Technical support

Please fill in your RMA or Product question on our website:

<https://www.triumphboard.com/support/technical-support/>

If you have any questions, please email us at [contact@triumphboard.com](mailto:contact@triumphboard.com).

TRIUMPH BOARD a.s.

Neklanova 122/15

128 00 Prague 2

Czech Republic

European Union

Phone: +420 224 910 221

E-mail: [info@triumphboard.com](mailto:info@triumphboard.com) [www.triumphboard.com](http://www.triumphboard.com)

### Notices:

Every effort has been made to ensure all information contained in this user guide is correct, but the accuracy or completeness is not guaranteed. Before using this device, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to this device not contained in this manual or any contrary statements appearing on your purchase order shall have no force of effect unless expressly agreed upon, in writing, with this company.

Reproduction or reprinting of this user guide or any part without permission is prohibited.

The content of this user manual is subject to change without prior notice.